




DO

CARGO, MEET CLAMP!

- ✓ **Mount it solid.** Screw the rail into a stud or a 1×4 board at minimum.
- ✓ **Measure first.** Pick 1", 1.33" or 2" for a snug fit.
- ✓ **Secure it.** Press down on the latch while pushing back on the red lip. See QR code for illustration.
- ✓ **Check it often.** Inspect latches and screws, more often in a vehicle.
- ✓ **Mind the direction.** 10" rail horizontal only. 4" rail vertical only.
- ✓ **Maximum 50 lb** per clamp.
- ✓ **Lock it for travel.** Use the double latch in a truck bed or cargo area.
- ✓ **Keep it clean.** Wipe with mild soap and water.

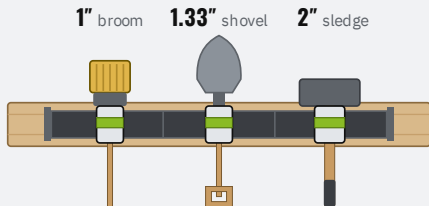

For complete instructions, follow the QR code.

DON'T

CARGO CLAMP LLC · PATENTED

- ✗ **Exceed 50 lb** per clamp.
- ✗ **Force the latch.** Wrong size can crack or slip.
- ✗ **Use near heat:** engines, exhaust, heaters.
- ✗ **Hold people or pets.** No climbing or lifting.
- ✗ **Mount to drywall alone.**
- ✗ **Let kids play with it.** Small parts.

NEVER ON THE OUTSIDE OF ANY VEHICLE

Do not use any Cargo Clamp on the outside of any vehicle, boat, RV, side-by-side, ATV, trailer, or any other type of transportation device. In a vehicle, use it only inside the truck bed or cargo area. **Exterior use of any Cargo Clamp is strictly against Cargo Clamp LLC recommendation and policy.**

90-DAY LIMITED WARRANTY

Cargo Clamp LLC warrants Cargo Clamp products against defects in materials and workmanship for **90 days** from the date of purchase. The warranty does not cover misuse, including any use on the outside of a vehicle or other transportation device, loads exceeding 50 lb per clamp, forced fits, heat damage or improper mounting.

For warranty questions, please email support@cargoclamp.com